

Metallized Polypropylene Film Interference Suppression Capacitors-Class X2

Structure

- Dielectric: Polypropylene film.
- Electrode: Special process metal vacuum evaporation layer.
- Encapsulate: Plastic case (UL94 V-0), Flame retardant epoxy resin sealing.

Typical Application




- Across the line, Surge suppression, EMI filtering in AC occasion; Power switch etc. E.g.: Lamps, Power sources, etc.

Characteristics

- Good appearance consistency; good self-healing property; strong resistance to humidity; can withstand high current; long lifetime; excellent overvoltage resistance.


Conform to RoHS standards

Safety Certificate

Safety Certificate	Certified Country	Certificate No.	Reference Standard
	USA, Canada	E528513	UL60384-14 CSA E60384-1:14
	Germany, EU	40052140	EN60384-14 VDE 0565-1-1/A1
	China	CQC22001364708	GB/T6346.14-2015
	South Korea	SU03083 - 16001A~16005A SU03083 - 22001	KC60384-14

Technical Parameter

Climatic Category	40/110/56B	
Operating Temperature Range	-40°C~110°C	
Rated Voltage	275/280/300/320Vac (50/60Hz)	
Capacitance Range	0.001μF ~ 10.0μF	
Capacitance Tolerance	J (±5%)、K (±10%)、M (±20%)	
Voltage Proof	Between Terminals	4.3U _R (Vdc), 1min
	Between Terminals To Case	2140Vac, 1min
Dissipation Factor	≤0.0010 (1kHz)	20°C, 1V
Insulation Resistance	C _R ≤0.33μF, R ≥15000MΩ	20°C, 100V, 1min
	C _R >0.33μF, RC ≥5000S	
Note: Products capacitance can be customized. Details specific parameters are according to Approval Sheet.		

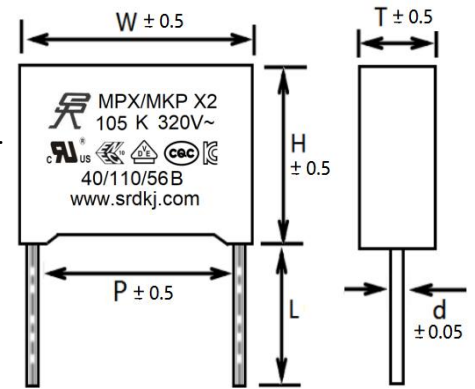

Metallized Polypropylene Film Interference Suppression Capacitors-Class X2

Part Number System

The 15 digits part number is formed as follow:

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

M P 2 1 0 5 K 3 2 E 5 R 8 0 0

Digit 1 to 3	Series Code: MP2 = X2
Digit 4 to 6	Rated Capacitance Value: 105=10x10 ⁵ pF=1.0μF
Digit 7	Capacitance Tolerance: J=±5%、K=±10%、M= ±20%
Digit 8 to 9	A.C. Rated Voltage: 27=275Vac; 28=280Vac; 30=300Vac; 32=320Vac
Digit 10 to 11	Dimensions Code: See The Dimension Comparison Table
Digit 12	Color Code: R - Gray; X - Yellow
Digit 13	Lead-wire Diameter Code: 5=0.5、6=0.6、8=0.8、1=1.0
Digit 14 to 15	Internal Recognition Code

Dimensions (mm) (Rated Voltage: 275/280/300/320Vac)

μ F	Part Number	W	T	H	P	d	μ F	Part Number	W	T	H	P	d
0.001	MP2102K**C2R600	13	5	11	10	0.6	0.0033	MP2332K**B2R600	10	5	11	7.5	0.6
0.0012	MP2122K**B2R600	10	5	11	7.5	0.6	0.0033	MP2332K**B1R500	10	4	9	7.5	0.5
0.0012	MP2122K**B1R500	10	4	9	7.5	0.5	0.0033	MP2332K**C2R600	13	5	11	10	0.6
0.0012	MP2122K**C2R600	13	5	11	10	0.6	0.0033	MP2332K**C1R600	13	4	9	10	0.6
0.0012	MP2122K**C1R600	13	4	9	10	0.6	0.0039	MP2392K**B2R600	10	5	11	7.5	0.6
0.0015	MP2152K**B2R600	10	5	11	7.5	0.6	0.0039	MP2392K**B1R500	10	4	9	7.5	0.5
0.0015	MP2152K**B1R500	10	4	9	7.5	0.5	0.0039	MP2392K**C2R600	13	5	11	10	0.6
0.0015	MP2152K**C2R600	13	5	11	10	0.6	0.0039	MP2392K**C1R600	13	4	9	10	0.6
0.0015	MP2152K**C1R600	13	4	9	10	0.6	0.0047	MP2472K**B2R600	10	5	11	7.5	0.6
0.0018	MP2182K**B2R600	10	5	11	7.5	0.6	0.0047	MP2472K**B1R500	10	4	9	7.5	0.5
0.0018	MP2182K**B1R500	10	4	9	7.5	0.5	0.0047	MP2472K**C2R600	13	5	11	10	0.6
0.0018	MP2182K**C2R600	13	5	11	10	0.6	0.0047	MP2472K**C1R600	13	4	9	10	0.6
0.0018	MP2182K**C1R600	13	4	9	10	0.6	0.0056	MP2562K**B2R600	10	5	11	7.5	0.6
0.0022	MP2222K**B2R600	10	5	11	7.5	0.6	0.0056	MP2562K**B1R500	10	4	9	7.5	0.5
0.0022	MP2222K**B1R500	10	4	9	7.5	0.5	0.0056	MP2562K**C2R600	13	5	11	10	0.6
0.0022	MP2222K**C2R600	13	5	11	10	0.6	0.0056	MP2562K**C1R600	13	4	9	10	0.6
0.0022	MP2222K**C1R600	13	4	9	10	0.6	0.0068	MP2682K**B2R600	10	5	11	7.5	0.6
0.0027	MP2272K**B2R600	10	5	11	7.5	0.6	0.0068	MP2682K**B1R500	10	4	9	7.5	0.5
0.0027	MP2272K**B1R500	10	4	9	7.5	0.5	0.0068	MP2682K**C2R600	13	5	11	10	0.6
0.0027	MP2272K**C2R600	13	5	11	10	0.6	0.0068	MP2682K**C1R600	13	4	9	10	0.6
0.0027	MP2272K**C1R600	13	4	9	10	0.6	0.0082	MP2822K**B2R600	10	5	11	7.5	0.6

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.

Metallized Polypropylene Film Interference Suppression Capacitors-Class X2

■ Dimensions (mm) (Rated Voltage: 275/280/300/320Vac)

μF	Part Number	W	T	H	P	d	μF	Part Number	W	T	H	P	d
0.0082	MP2822K**B1R500	10	4	9	7.5	0.5	0.056	MP2563K**C2R600	13	5	11	10	0.6
0.0082	MP2822K**C2R600	13	5	11	10	0.6	0.056	MP2563K**CDR600	12.5	5.2	13	10	0.6
0.0082	MP2822K**C1R600	13	4	9	10	0.6	0.068	MP2683K**B3R600	10	6	12	7.5	0.6
0.01	MP2103K**B2R600	10	5	11	7.5	0.6	0.068	MP2683K**C2R600	13	5	11	10	0.6
0.01	MP2103K**B1R500	10	4	9	7.5	0.5	0.068	MP2683K**C3R600	13	6	12	10	0.6
0.01	MP2103K**C2R600	13	5	11	10	0.6	0.082	MP2823K**CDR600	12.5	5.2	13	10	0.6
0.01	MP2103K**C1R600	13	4	9	10	0.6	0.082	MP2823K**CGR600	12.5	6.2	15.5	10	0.6
0.012	MP2123K**B2R600	10	5	11	7.5	0.6	0.1	MP2104K**CGR600	12.5	6.2	15.5	10	0.6
0.012	MP2123K**B1R500	10	4	9	7.5	0.5	0.1	MP2104K**C3R600	13	6	12	10	0.6
0.012	MP2123K**C2R600	13	5	11	10	0.6	0.1	MP2104K**C2R600	13	5	11	10	0.6
0.012	MP2123K**C1R600	13	4	9	10	0.6	0.1	MP2104K**L2R800	15	6	15.5	12.5	0.8
0.015	MP2153K**B2R600	10	5	11	7.5	0.6	0.1	MP2104K**D1R600	18	5	11	15	0.6
0.015	MP2153K**B1R500	10	4	9	7.5	0.5	0.1	MP2104K**D2R800	18	6	12	15	0.8
0.015	MP2153K**C2R600	13	5	11	10	0.6	0.12	MP2124K**CGR600	12.5	6.2	15.5	10	0.6
0.015	MP2153K**C1R600	13	4	9	10	0.6	0.12	MP2124K**L2R800	15	6	15.5	12.5	0.8
0.018	MP2183K**B2R600	10	5	11	7.5	0.6	0.12	MP2124K**D2R800	18	6	12	15	0.8
0.018	MP2183K**B1R500	10	4	9	7.5	0.5	0.12	MP2124K**D1R600	18	5	11	15	0.6
0.018	MP2183K**C2R600	13	5	11	10	0.6	0.15	MP2154K**CGR600	12.5	6.2	15.5	10	0.6
0.018	MP2183K**C1R600	13	4	9	10	0.6	0.15	MP2154K**C3R600	13	6	12	10	0.6
0.022	MP2223K**B2R600	10	5	11	7.5	0.6	0.15	MP2154K**L2R800	15	6	15.5	12.5	0.8
0.022	MP2223K**B1R500	10	4	9	7.5	0.5	0.15	MP2154K**DDR800	17.5	6.2	15.5	15	0.8
0.022	MP2223K**C2R600	13	5	11	10	0.6	0.15	MP2154K**DBR600	17.5	5.2	13	15	0.6
0.022	MP2223K**C1R600	13	4	9	10	0.6	0.18	MP2184K**CKR600	12.5	7.2	17.5	10	0.6
0.027	MP2273K**B2R600	10	5	11	7.5	0.6	0.18	MP2184K**CGR600	12.5	6.2	15.5	10	0.6
0.027	MP2273K**B1R500	10	4	9	7.5	0.5	0.18	MP2184K**L2R800	15	6	15.5	12.5	0.8
0.027	MP2273K**C2R600	13	5	11	10	0.6	0.18	MP2184K**DDR800	17.5	6.2	15.5	15	0.8
0.027	MP2273K**C1R600	13	4	9	10	0.6	0.18	MP2184K**D2R800	18	6	12	15	0.8
0.033	MP2333K**B2R600	10	5	11	7.5	0.6	0.22	MP2224K**CKR600	12.5	7.2	17.5	10	0.6
0.033	MP2333K**C2R600	13	5	11	10	0.6	0.22	MP2224K**C5R600	13	7.8	13.8	10	0.6
0.033	MP2333K**C1R600	13	4	9	10	0.6	0.22	MP2224K**L3R800	15	7	17.5	12.5	0.8
0.039	MP2393K**B3R600	10	6	12	7.5	0.6	0.22	MP2224K**D4R800	18	8.4	14.5	15	0.8
0.039	MP2393K**B2R600	10	5	11	7.5	0.6	0.22	MP2224K**DGR800	17.5	7.2	17.5	15	0.8
0.039	MP2393K**C2R600	13	5	11	10	0.6	0.22	MP2224K**DDR800	17.5	6.2	15.5	15	0.8
0.039	MP2393K**C1R600	13	4	9	10	0.6	0.22	MP2224K**DBR600	17.5	5.2	13	15	0.6
0.047	MP2473K**B3R600	10	6	12	7.5	0.6	0.27	MP2274K**CNR600	12.5	8.2	18.5	10	0.6
0.047	MP2473K**B2R600	10	5	11	7.5	0.6	0.27	MP2274K**CKR600	12.5	7.2	17.5	10	0.6
0.047	MP2473K**C2R600	13	5	11	10	0.6	0.27	MP2274K**L3R800	15	7	17.5	12.5	0.8
0.056	MP2563K**B3R600	10	6	12	7.5	0.6	0.27	MP2274K**DGR800	17.5	7.2	17.5	15	0.8

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.

Metallized Polypropylene Film Interference Suppression Capacitors-Class X2

μ F	Part Number	W	T	H	P	d	μ F	Part Number	W	T	H	P	d
0.27	MP2274K**DDR800	17.5	6.2	15.5	15	0.8	0.82	MP2824K**DUR800	17.5	11.2	23.5	15	0.8
0.33	MP2334K**CRR600	12.5	9.2	19.5	10	0.6	0.82	MP2824K**E4R800	26.5	10	19	22.5	0.8
0.33	MP2334K**CNR600	12.5	8.2	18.5	10	0.6	0.82	MP2824K**E5R800	26.5	11	20	22.5	0.8
0.33	MP2334K**L4R800	15	8	18.5	12.5	0.8	1.0	MP2105K**DXR800	17.5	12.2	24.5	15	0.8
0.33	MP2334K**L3R800	15	7	17.5	12.5	0.8	1.0	MP2105K**E4R800	26.5	10	19	22.5	0.8
0.33	MP2334K**DKR800	17.5	8.2	18.5	15	0.8	1.0	MP2105K**E5R800	26.5	11	20	22.5	0.8
0.33	MP2334K**DGR800	17.5	7.2	17.5	15	0.8	1.0	MP2105K**E6R800	26	12	21.5	22.5	0.8
0.33	MP2334K**D4R800	18	8.4	14.5	15	0.8	1.0	MP2105K**F1R800	31.5	10.8	19.5	27.5	0.8
0.33	MP2334K**D3R800	18	7.5	13.5	15	0.8	1.2	MP2125K**E6R800	26	12	21.5	22.5	0.8
0.33	MP2334K**DDR800	17.5	6.2	15.5	15	0.8	1.2	MP2125K**F2R800	31.5	13	21.5	27.5	0.8
0.33	MP2334K**E2R800	26.5	7	16.5	22.5	0.8	1.2	MP2125K**F1R800	31.5	10.8	19.5	27.5	0.8
0.33	MP2334K**E3R800	26.5	8.5	17	22.5	0.8	1.5	MP2155K**E7R800	26.5	13	23	22.5	0.8
0.39	MP2394K**L4R800	15	8	18.5	12.5	0.8	1.5	MP2155K**F3R800	31	14	25	27.5	0.8
0.39	MP2394K**DNR800	17.5	9.2	19.5	15	0.8	1.5	MP2155K**F2R800	31.5	13	21.5	27.5	0.8
0.39	MP2394K**DKR800	17.5	8.2	18.5	15	0.8	1.5	MP2155K**SOR100	41.5	11	22	37.5	1.0
0.39	MP2394K**DDR800	17.5	6.2	15.5	15	0.8	1.8	MP2185K**F2R800	31.5	13	21.5	27.5	0.8
0.39	MP2394K**E2R800	26.5	7	16.5	22.5	0.8	1.8	MP2185K**F3R800	31	14	25	27.5	0.8
0.39	MP2394K**E3R800	26.5	8.5	17	22.5	0.8	1.8	MP2185K**S1R100	41.5	12	26	37.5	1.0
0.47	MP2474K**L4R800	15	8	18.5	12.5	0.8	1.8	MP2185K**SOR100	41.5	11	22	37.5	1.0
0.47	MP2474K**D8R800	18	11.2	19.2	15	0.8	2.0	MP2205K**F3R800	31	14	25	27.5	0.8
0.47	MP2474K**D6R800	18	10	16	15	0.8	2.0	MP2205K**F4R800	31.5	16	25.5	27.5	0.8
0.47	MP2474K**DKR800	17.5	8.2	18.5	15	0.8	2.0	MP2205K**S1R100	41.5	12	26	37.5	1.0
0.47	MP2474K**D4R800	18	8.4	14.5	15	0.8	2.0	MP2205K**SOR100	41.5	11	22	37.5	1.0
0.47	MP2474K**DGR800	17.5	7.2	17.5	15	0.8	2.2	MP2225K**F5R800	31.5	16	30	27.5	0.8
0.47	MP2474K**E2R800	26.5	7	16.5	22.5	0.8	2.2	MP2225K**F3R800	31	14	25	27.5	0.8
0.47	MP2474K**E3R800	26.5	8.5	17	22.5	0.8	2.2	MP2225K**S2R100	41.5	14	28	37.5	1.0
0.47	MP2474K**E4R800	26.5	10	19	22.5	0.8	2.2	MP2225K**S1R100	41.5	12	26	37.5	1.0
0.56	MP2564K**DRR800	17.5	10.2	22.5	15	0.8	2.5	MP2255K**F5R800	31.5	16	30	27.5	0.8
0.56	MP2564K**DNR800	17.5	9.2	19.5	15	0.8	2.5	MP2255K**F4R800	31.5	16	25.5	27.5	0.8
0.56	MP2564K**DKR800	17.5	8.2	18.5	15	0.8	2.5	MP2255K**S2R100	41.5	14	28	37.5	1.0
0.56	MP2564K**E3R800	26.5	8.5	17	22.5	0.8	2.5	MP2255K**S1R100	41.5	12	26	37.5	1.0
0.56	MP2564K**E4R800	26.5	10	19	22.5	0.8	2.7	MP2275K**F9R800	31.5	18	28	27.5	0.8
0.68	MP2684K**DUR800	17.5	11.2	23.5	15	0.8	2.7	MP2275K**F4R800	31.5	16	25.5	27.5	0.8
0.68	MP2684K**DRR800	17.5	10.2	22.5	15	0.8	2.7	MP2275K**S2R100	41.5	14	28	37.5	1.0
0.68	MP2684K**D8R800	18	11.2	19.2	15	0.8	2.7	MP2275K**S1R100	41.5	12	26	37.5	1.0
0.68	MP2684K**DKR800	17.5	8.2	18.5	15	0.8	3.0	MP2305K**F6R800	31.5	18	33	27.5	0.8
0.68	MP2684K**D6R800	18	10	16	15	0.8	3.0	MP2305K**F4R800	31.5	16	25.5	27.5	0.8
0.68	MP2684K**L6R800	15	10	22.5	12.5	0.8	3.0	MP2305K**S3R100	41.5	16	30	37.5	1.0
0.68	MP2684K**E4R800	26.5	10	19	22.5	0.8	3.0	MP2305K**S2R100	41.5	14	28	37.5	1.0
0.68	MP2684K**E3R800	26.5	8.5	17	22.5	0.8	3.3	MP2335K**F6R800	31.5	18	33	27.5	0.8

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.

Metallized Polypropylene Film Interference Suppression Capacitors-Class X2

■ Dimensions (mm) (Rated Voltage: 275/280/300/320Vac)

μF	Part Number	W	T	H	P	d	μF	Part Number	W	T	H	P	d
3.3	MP2335K**F9R800	31.5	18	28	27.5	0.8	5.0	MP2505K**F6R800	31.5	18	33	27.5	0.8
3.3	MP2335K**F5R800	31.5	16	30	27.5	0.8	5.0	MP2505K**S5R100	41.5	18.5	33.5	37.5	1.0
3.3	MP2335K**S3R100	41.5	16	30	37.5	1.0	5.0	MP2505K**S3R100	41.5	16	30	37.5	1.0
3.3	MP2335K**S2R100	41.5	14	28	37.5	1.0	5.6	MP2565K**S6R100	41.5	22	37	37.5	1.0
3.5	MP2355K**F6R800	31.5	18	33	27.5	0.8	5.6	MP2565K**S5R100	41.5	18.5	33.5	37.5	1.0
3.5	MP2355K**F9R800	31.5	18	28	27.5	0.8	6.0	MP2605K**S6R100	41.5	22	37	37.5	1.0
3.5	MP2355K**S3R100	41.5	16	30	37.5	1.0	6.0	MP2605K**S5R100	41.5	18.5	33.5	37.5	1.0
3.5	MP2355K**S2R100	41.5	14	28	37.5	1.0	6.8	MP2685K**S6R100	41.5	22	37	37.5	1.0
3.9	MP2395K**F6R800	31.5	18	33	27.5	0.8	6.8	MP2685K**S5R100	41.5	18.5	33.5	37.5	1.0
3.9	MP2395K**S4R100	41.5	17	32	37.5	1.0	7.0	MP2705K**S7R100	41.5	26	41	37.5	1.0
3.9	MP2395K**S3R100	41.5	16	30	37.5	1.0	7.0	MP2705K**S6R100	41.5	22	37	37.5	1.0
4.0	MP2405K**F6R800	31.5	18	33	27.5	0.8	7.5	MP2755K**S7R100	41.5	26	41	37.5	1.0
4.0	MP2405K**S4R100	41.5	17	32	37.5	1.0	7.5	MP2755K**S6R100	41.5	22	37	37.5	1.0
4.0	MP2405K**S3R100	41.5	16	30	37.5	1.0	8.0	MP2805K**S7R100	41.5	26	41	37.5	1.0
4.5	MP2455K**F6R800	31.5	18	33	27.5	0.8	8.0	MP2805K**S6R100	41.5	22	37	37.5	1.0
4.5	MP2455K**S5R100	41.5	18.5	33.5	37.5	1.0	8.2	MP2825K**S7R100	41.5	26	41	37.5	1.0
4.5	MP2455K**S3R100	41.5	16	30	37.5	1.0	8.2	MP2825K**S6R100	41.5	22	37	37.5	1.0
4.7	MP2475K**F6R800	31.5	18	33	27.5	0.8	9.0	MP2905K**S7R100	41.5	26	41	37.5	1.0
4.7	MP2475K**S5R100	41.5	18.5	33.5	37.5	1.0	9.0	MP2905K**S6R100	41.5	22	37	37.5	1.0
4.7	MP2475K**S3R100	41.5	16	30	37.5	1.0	10.0	MP2106K**S8R100	41.5	28	43	37.5	1.0

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.

Safety Film Mini Size Series (SP2)

■ Dimensions (mm) Rated Voltage: 275/280/300/320Vac

μF	Part Number	W	T	H	P	d	μF	Part Number	W	T	H	P	d
0.22	SP2224K**CDR600	12.5	5.2	13.0	10	0.6	1.0	SP2105K**E2R800	26.5	7	16.5	22.5	0.8
0.27	SP2274K**CDR600	12.5	5.2	13.0	10	0.6	1.2	SP2125K**DKR800	17.5	8.2	18.5	15	0.8
0.33	SP2334K**CGR600	12.5	6.2	15.5	10	0.6	1.2	SP2125K**E2R800	26.5	7	16.5	22.5	0.8
0.33	SP2334K**DBR600	17.5	5.2	13.0	15	0.6	1.5	SP2155K**DNR800	17.5	9.2	19.5	15	0.8
0.39	SP2394K**CGR600	12.5	6.2	15.5	10	0.6	1.5	SP2155K**E3R800	26.5	8.5	17	22.5	0.8
0.39	SP2394K**DBR600	17.5	5.2	13.0	15	0.6	1.8	SP2185K**DRR800	17.5	10.2	22.5	15	0.8
0.47	SP2474K**CKR600	12.5	7.2	17.5	10	0.6	1.8	SP2185K**E3R800	26.5	8.5	17	22.5	0.8
0.47	SP2474K**DBR600	17.5	5.2	13.0	15	0.6	2.0	SP2205K**DRR800	17.5	10.2	22.5	15	0.8
0.56	SP2564K**CKR600	12.5	7.2	17.5	10	0.6	2.2	SP2225K**DUR800	17.5	11.2	23.5	15	0.8
0.56	SP2564K**DDR800	17.5	6.2	15.5	15	0.8	2.2	SP2225K**E4R800	26.5	10	19	22.5	0.8
0.68	SP2684K**CNR600	12.5	8.2	18.5	10	0.6	2.5	SP2255K**DXR800	17.5	12.2	24.5	15	0.8
0.68	SP2684K**DDR800	17.5	6.2	15.5	15	0.8	2.7	SP2275K**DXR800	17.5	12.2	24.5	15.0	0.8
0.82	SP2824K**CRR600	12.5	9.2	19.5	10	0.6	2.7	SP2275K**E5R800	26.5	11	20	22.5	0.8
0.82	SP2824K**DGR800	17.5	7.2	17.5	15	0.8	3.3	SP2335K**E6R800	26.0	12	21.5	22.5	0.8
1.0	SP2105K**DGR800	17.5	7.2	17.5	15	0.8	3.9	SP2395K**E7R800	26.5	13	23	22.5	0.8

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.

Ultra Mini Size Series: Use for GaN Chargers

■ Dimensions (mm) Rated Voltage: 275/280/300/320Vac

μ F	Part Number	W	T	H	P	d	μ F	Part Number	W	T	H	P	d
0.1	MP2104K**B1R500	10	4	9	7.5	0.5	0.33	SP2334K**CDR600	12.5	5.2	13	10	0.6
0.15	MP2154K**B1R500	10	4	9	7.5	0.5	0.47	SP2474K**CDR600	12.5	5.2	13	10	0.6
0.22	MP2224K**B2R600	10	5	11	7.5	0.6	0.56	SP2564K**CGR600	12.5	6.2	15.5	10	0.6
0.33	MP2334K**B3R600	10	6	12	7.5	0.6	0.68	SP2684K**CGR600	12.5	6.2	15.5	10	0.6
0.47	MP2474K**B6R600	10	6	16	7.5	0.6	0.82	SP2824K**CKR600	12.5	7.2	17.5	10	0.6
0.22	SP2224K**CBR600	12.5	4.2	11	10	0.6	1.0	SP2105K**CKR600	12.5	7.2	17.5	10	0.6

Note: “**” represents the Rated Voltage, replace it with the corresponding Rated Voltage code.